

# Transformers for power supplies

**A-Trafo**  
**Type A 35-A 200**

## Applications:

With separate windings, used as single-phase voltage supply unit for 12 V or 24 V.

## Benefits:

- Very low Standby-losses <1,5 W with 200 VA
- Energy saving
- Compact construction with screw connection
- Reduced magnetic stray field
- Very high efficiency
- High capacity
- No hum
- Easy installation in accordance with DIN 41308
- Low power losses
- EMC compliant, no additional devices required
- Manufactured in accordance with EN 61558-1

## Option:


Terminals in accordance with VBG 4 or insulated flying leads




## Technical data

Type	Rated Capacity VA	Input Voltage V	Output Voltage V	Current 2x12V A
A 35	35	2 x 115 or 230	2 x 12 or 24	2 x 1.46
A 60	60			2 x 2.50
A 75	75			2 x 3.12
A 100	100			2 x 4.17
A 150	150			2 x 6.25
A 200	200			2 x 8.33

Frequency: 50/400 Hz

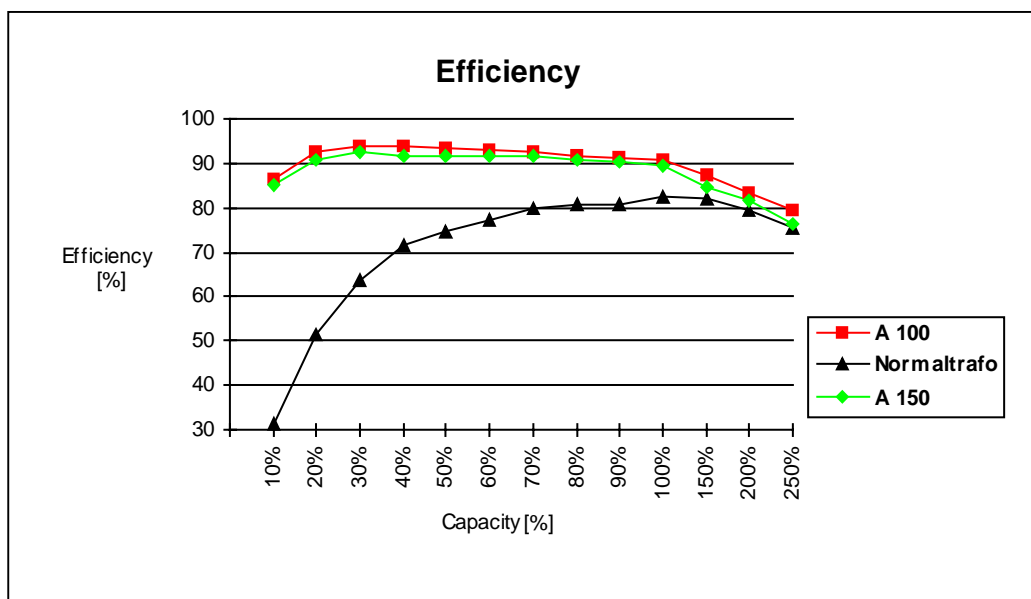

## Dimension Drawing

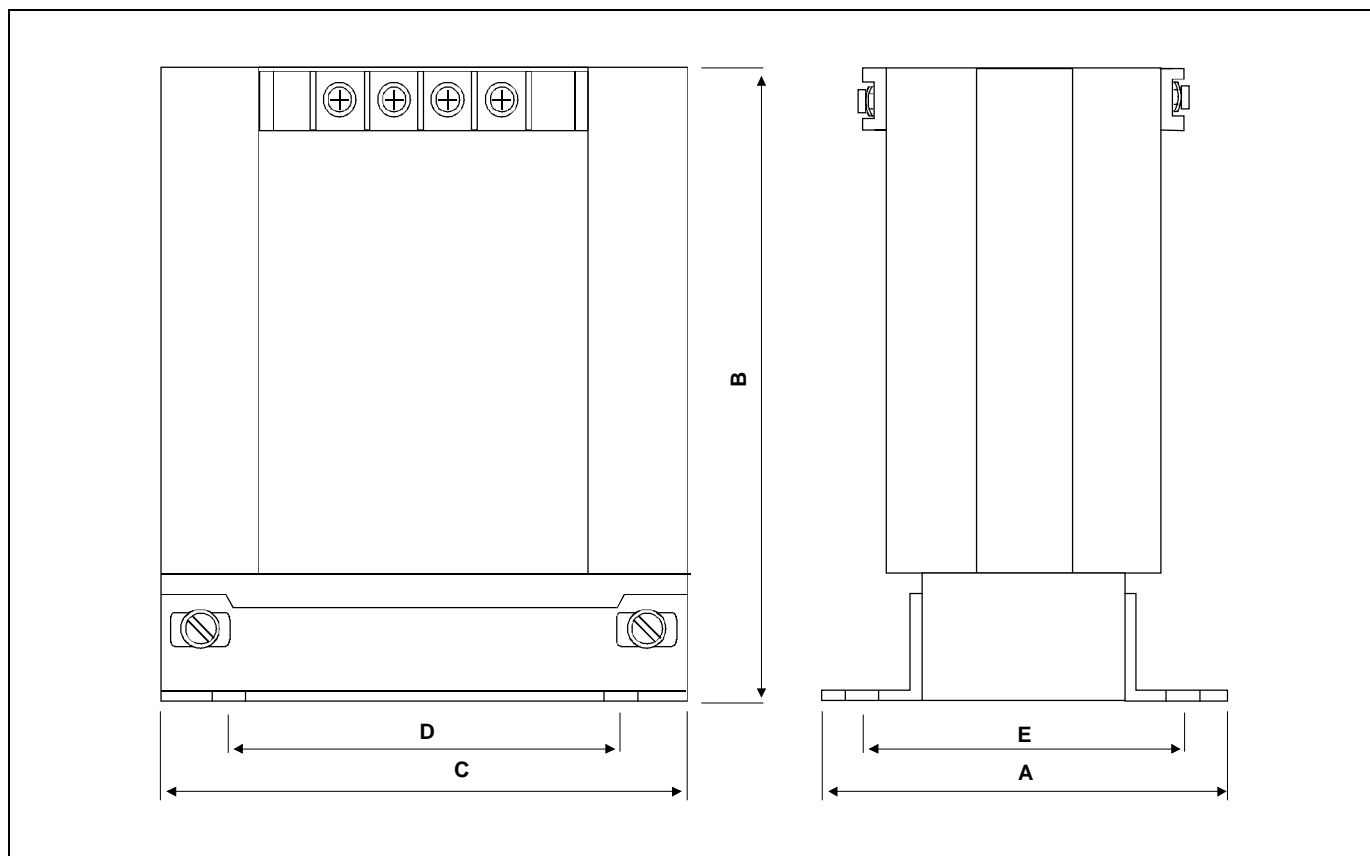

## Dimensions

Type	A mm	B mm	C mm	D mm	E mm	Insert Nuts	Weight kg
A 35	55	92	77	50	40	M4	1.0
A 60	58.5	105	86	56	45	M4	1.25
A 75	60	110	96	64	47	M4	1.5
A 100	74	113	96	64	60	M4	1.7
A 150	86	134	104	84	70	M4	2.25
A 200	86	145	115	84	70	M4	3.15

Special voltages and higher capacities on request