

### Type RZDS Small Footprint Design




**Toroidal Suppression Choke, available in 3 styles, open, low profile and small footprint. Manufactured using UL listed materials**

**Technical Data:-**  
**Rated Voltage: 250 V, AC**  
**Rated Current: 0.3 A - 10 A**  
**Inductance: 68mH - 1.8mH**  
**Frequency: 50 / 60 Hz**

*Custom Designs Available*

Type	Dim	I <sub>N</sub> A	L <sub>N</sub> mH	L <sub>s</sub> typical μH	R typical mΩ
RZDS-0.3/47	B	0.3	2 x 47mH	760	1400
RZDS-0.4/27	A	0.4	2 x 27mH	270	1000
RZDS-0.4/39	A	0.4	2 x 39mH	450	2600
RZDS-0.5/18	A	0.5	2 x 18mH	260	940
RZDS-0.5/27	B	0.5	2 x 27mH	430	900
RZDS-0.5/56	C	0.5	2 x 56mH	870	2000
RZDS-0.5/82	D	0.5	2 x 82mH	1000	1300
RZDS-0.7/10	A	0.7	2 x 10mH	90	360
RZDS-1/10	B	1	2 x 10mH	140	450
RZDS-1/27	C	1	2 x 27mH	440	600
RZDS-1/33	D	1	2 x 33mH	420	640
RZDS-1/68	E	1	2 x 68mH	900	1000
RZDS-1.2/6.8	A	1.2	2 x 6.8mH	70	330
RZDS-1.4/27	D	1.4	2 x 27mH	310	300
RZDS-1.5/3.3	A	1.5	2 x 3.3mH	37	100
RZDS-2/1	A	2	2 x 1.0mH	13	40
RZDS-2/18	E	2	2 x 18mH	230	230
RZDS-2/2.2	B	2	2 x 2.2mH	30	70
RZDS-2/5.6	C	2	2 x 5.6mH	80	160
RZDS-2/6.8	D	2	2 x 6.8mH	80	120
RZDS-2.6/0.4	A	2.6	2 x 0.4mH	6	60
RZDS-3/1.2	B	3	2 x 1.2mH	17	56
RZDS-3.6/0.4	A	3.6	2 x 0.4mH	6	15
RZDS-4/2.7	C	4	2 x 2.7mH	30	45
RZDS-4/3.3	D	4	2 x 3.3mH	40	40
RZDS-4/6.8	E	4	2 x 6.8mH	80	60
RZDS-6/3.9	E	6	2 x 3.9mH	45	38
RZDS-8/2.7	E	8	2 x 2.7mH	30	22
RZDS-10/1.8	E	10	2 x 1.8mH	20	14

### Dimensions

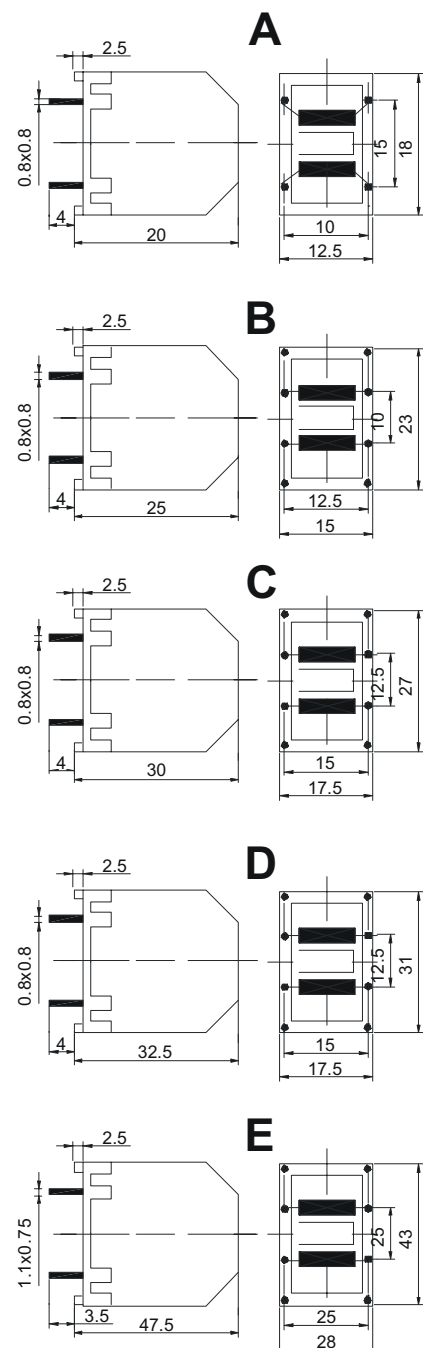

### REO (UK) LTD

Units 8-10, Long Lane Industrial Estate  
 Craven Arms, Shropshire SY7 8DU  
 Tel: 01588 673411 Fax: 01588 672718  
 email: sales@reo.co.uk  
 www.reo.co.uk