



# BW 200 BW 201

## Dimensional Information

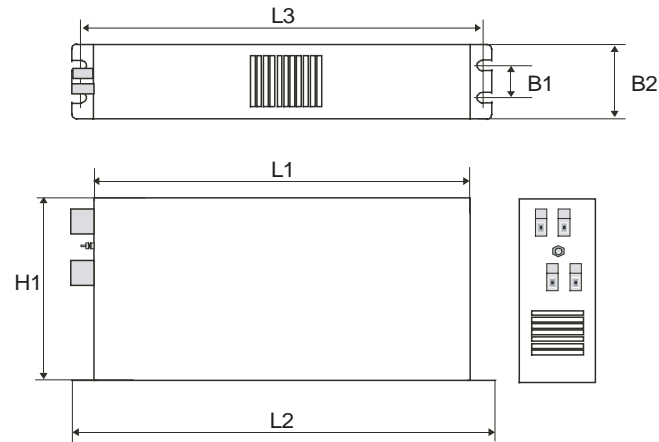

- 1 6,3 mm Flachstecker  
Flat plug/Fiche plate
- 2 VDFK 4
- 3 VDFK 6
- 4 HDFK 10
- 5 HDFK 25
- 6 HDFK 50
- 7 HDFK 95
- 8 Litze/Strand/Cordon
- 9 Erdungsbolzen/Earthing bolt  
Boulon de mise à terre



## Circuit Diagram

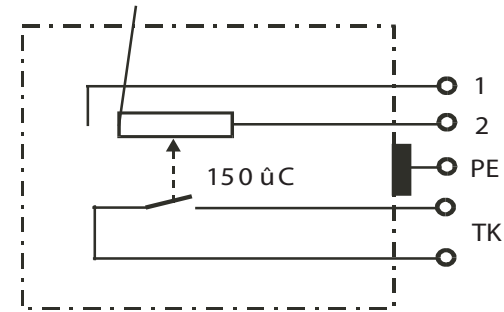

## Load Diagram

$$P_{max} = \frac{P * 100}{Duty[\%]}$$

$$Duty[\%] = \frac{Duty[s]}{Cycle[s]} * 100$$

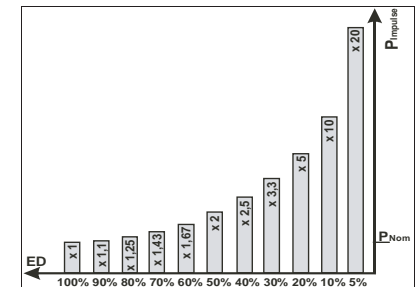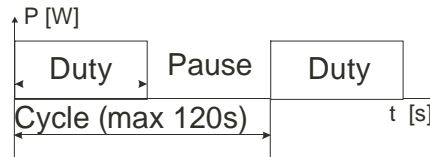

Type	L1 (mm)	L2 (mm)	L3 (mm)	B1 (mm)	B2 (mm)	H1 (mm)	Connections	Converter power up to (kW)	For Braking Power (W)	Resistance (Ω)	Continuous Duty (%)
BW201/100	225	255	240	25	50	126	2/2/9	3.0	100	220	3
BW201/150	275	305	290	30	55	142	2/2/9	5.0	150	130	3
BW201/250	275	305	290	20	55	142	2/2/9	7.5	250	96	3
BW201/450	305	335	320	35	60	150	2/2/9	15.0	450	45	3
BW201/600	300	330	314	45	70	185	2/2/9	20.0	600	32	3