

REOMED 1000

Isolation transformers



Unique Selling Point

- IEC 60601-1 (ed 3.1)
- IEC 60601-1-2 (ed 4.0)
- Certificated according to NRTL
- Optional shield winding between primary and secondary current
- Variants with filter and surge protection
- High efficiency with a very low magnetic field
- Wide range of options
- Small weight
- Short-circuit and overload protection
- Integral start-up current limiter
- Solid aluminum casing
- Euiopotential bonding pin DIN 42801
- Output sockets EN 60320

Description

The TÜV-certified REOMED isolating transformers are proven and reliable equipment for use with all electrical systems in a medical environment. They reduce the leakage current and thus help to ensure the safety of patients.

REOMED isolating transformers are characterized by their very low magnetic stray-fields and reliability, whilst also providing high efficiency and easy connectivity.

Application area:

- Medical systems

Technical Data

- Rated power : 1000 VA
- Input voltage : 115 / 230 V

REOMED 1000

Isolation transformers

REOMED	1000					
Nominal input power [VA]	1000	1000	1000	1000	1000	1000
Input voltage [V]	115/230	230	115	115	230	115/230
Output voltage [V]	230	230	230	115	115	115/230
Mains frequency [Hz]	50/60	50/60	50/60	50/60	50/60	50/60
Input power plug	1 piece IE C/EN 60320 (C14) UL 498, CSA C22.2 no. 42					
Output power plug	9 piece IEC/EN60320-2-2 (C13) UL 498 CSA C22.2 no. 42					
Power switch [0-1]	yes	yes	yes	yes	yes	yes
Input fuse [A]	T10/T5	T5	T10	T10	T5	T10/T5
Thermal overload protection [°C]	120	120	120	120	120	120
Max. output current [A]	4,35	4,35	4,35	8,70	8,70	8,70/4,35
Output fuse [A]	-	-	-	-	-	-
Start-up current limiter	yes	yes	yes	yes	yes	yes
Standard	electronic	electronic	electronic	electronic	electronic	electronic
Earth leakage current 127/254V [µA]	<300/500	<300/500	<300/500	<300/500	<300/500	<300/500
Insulation / protection resistance [Ω]	>2M/<0,1	>2M/<0,1	>2M/<0,1	>2M/<0,1	>2M/<0,1	>2M/<0,1
Test voltage	primary-secondary: 4kV AC; primary housing / secondary housing: 1,5kV AC					
Protection class/med. class/Type	I/I	I/I	I/I	I/I	I/I	I/I
Protection IP	IP20	IP20	IP20	IP20	IP20	IP20
Ambient temperature [°C]	±0 - +40	±0 - +40	±0 - +40	±0 - +40	±0 - +40	±0 - +40
Ambient air humidity [%]	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75	Relative 30 - 75
Max. altitude [m/feet]	3000/9864	3000/9864	3000/9864	3000/9864	3000/9864	3000/9864
Equi-potential earthing (DIN42801)	POAG - S6/15					
Housing, Surface	Powder-coated metal - RAL 7035					
Dimensions (BxHxT) [mm/in]	220x100*x300 (*with rubber feet 105)/8,66x3,94*x11,81 (*with rubber feet 4,13)					
Weight [kg/lbs]	12,5/27.5					
Approval / principles / Conformity CE	IEC60601-1:2005/AMD1:2012; ANSI/AAMIES 60601-1:2005/CR/2012 CAN/CSA C22.2 No. 60601-1:14 (Medical) USA and Canada IEC60601-1-2:2014(Partly); EN/IEC 61000-3-2:2014; EN/IEC 61000-3-3:2013					
Accessories (Options)						
Power line	Country-specific					
Mounting rails	Mounting kit (2x mounting rails, 4x hexagon screw)					


Your contact:

+44 1588 673 411 • main@reo.co.uk



REOMED 1000

Isolation transformers

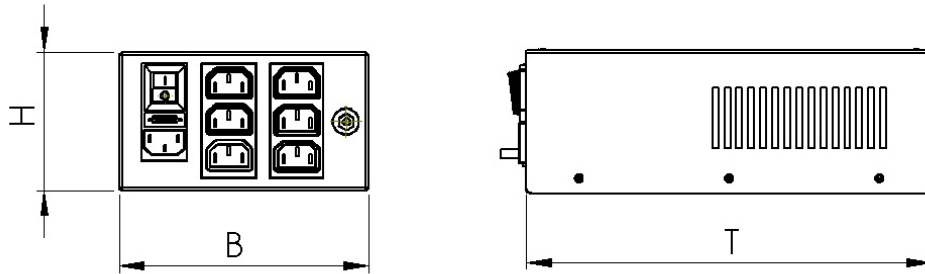

Type	H (mm/in)	B (mm/in)	T (mm/in)	Weight (kg/lbs)
REOMED 1000	100 (105*)/3.94 (4.13)	220/8.66	300/11.81	12,5/27.5

*With rubber feet